
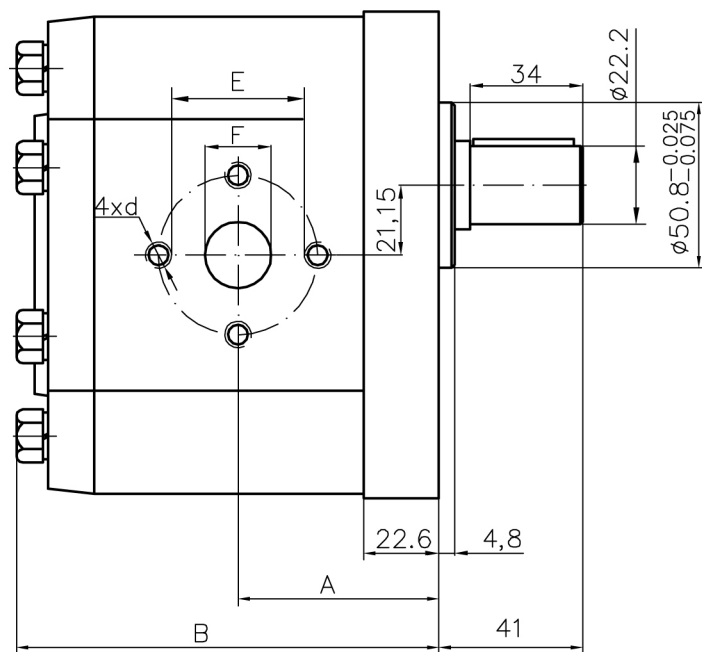


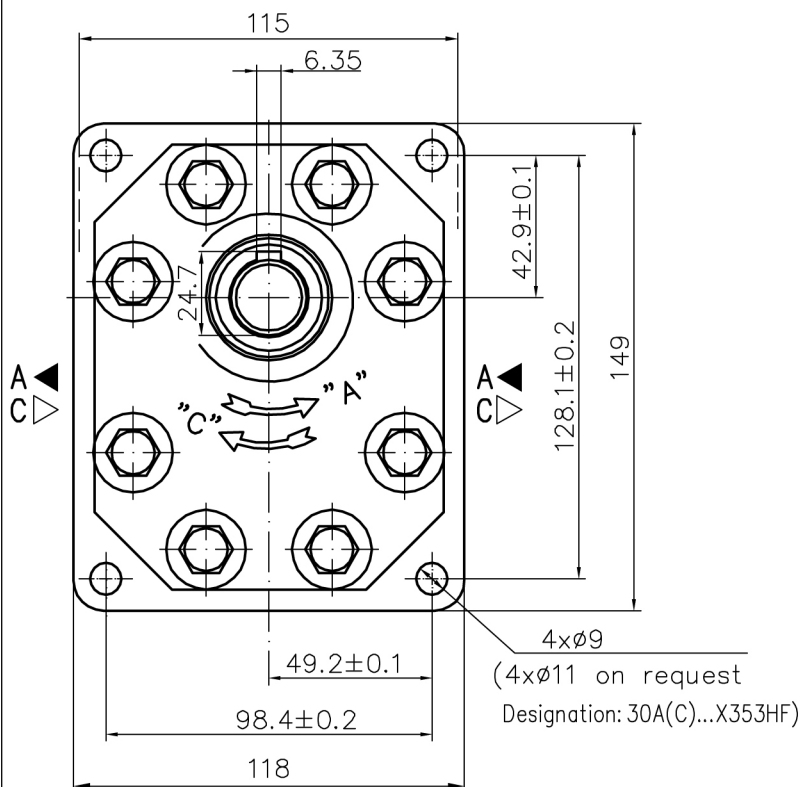

Type	Displacement	Flow		Pressure	max Speed	Dimension										
		at 1500 rpm	at max rpm			P _{nom}	n	A	B	Inlet			Outlet			
	cm ³ /rev	l/min	l/min	bar	rpm	mm	mm	E	d	F	E	d	F			
30A(C)20X353H	20	28,2	56,4	250	3000	56,1	116,7	40	M8	19	40	M8	19			
30A(C)22,2X353H	22,5	31,7	63,5	250	3000	57,6	119,7									
30A(C)25X353H	25	35,3	70,5	250	3000	58,3	121,1									
30A(C)28X353H	28	39,5	79,0	250	3000	60,2	124,7									
30A(C)32X353	32	45,1	75,2	250	2500	62,0	128,3	51	M10	27				40	M8	19
30A(C)32X353H	32	45,1	90,2	250	3000	66,5	137,3									
30A(C)36X353	36	50,8	84,6	250	2500	63,5	131,4									
30A(C)36X353H	36	51,3	95,8	250	2800	68,0	140,5									
30A(C)42X353	42	59,9	91,8	230	2300	66,3	137,0									
30A(C)42X353H	42	59,9	99,8	230	2500	70,8	146,1									
30A(C)46X353H	46	65,6	100,5	230	2300	72,7	149,8									
30A(C)50X353H	50	71,3	99,8	200	2100	74,5	153,4									
30A(C)55X353H	55	78,4	91,4	200	1750	76,7	157,9									
30A(C)60X353H	60	85,5	99,8	180	1750	78,7	162,4									